


strands®

-lighting division

MANUAL

FOR9T DRAGON DRIVE 7"

(PIN1)RED = +VDC (XPERIENCE MODE)*
(PIN2)BLACK = - TO CHASSIS GROUND
(PIN3)WHITE= + WHITE POSITION LIGHT
(PIN4)YELLOW= + AMBER POSITION LIGHT
(LOOSE CABLE)GREEN= +VDC (E-MODE)*

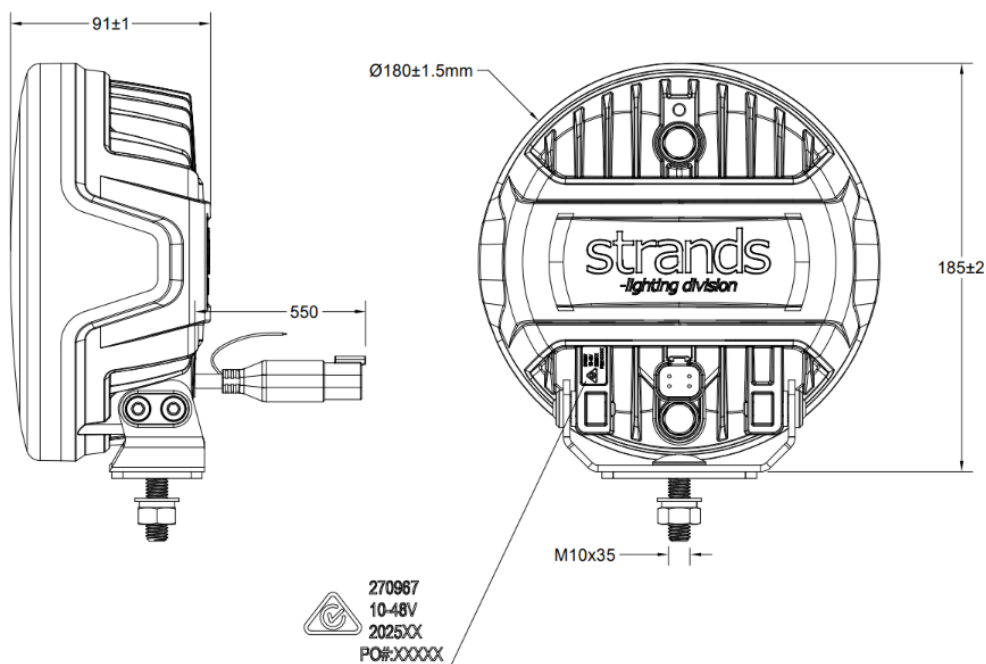

*Cable connection for E-mode and Xperience mode:

Green Cable: Activates E-Mode.

Red Cable (DT4): Activates Xperience Mode.

Priority for both mode:

When both green and red cables are connected to the battery's positive pole, E-Mode takes priority over Xperience Mode. Xperience Mode will not be activated.

Mode Switching:

To activate Xperience Mode, the E-Mode connection must be powered off. This can be achieved by using an external switch to disconnect the E-Mode signal or by interrupting the power supply to the E-Mode system. Ensure the wiring is properly configured to allow for this switching between modes.


*If you don't need E-mode then do not required to connect green cable.

Please refer to the connection diagram on page 2 for an example of how to connect 3 lights.

strands[®]

-lighting division

Note: The connection diagram shown is for example only. This guide focuses on connecting an external switch for a 3 X Driving lights

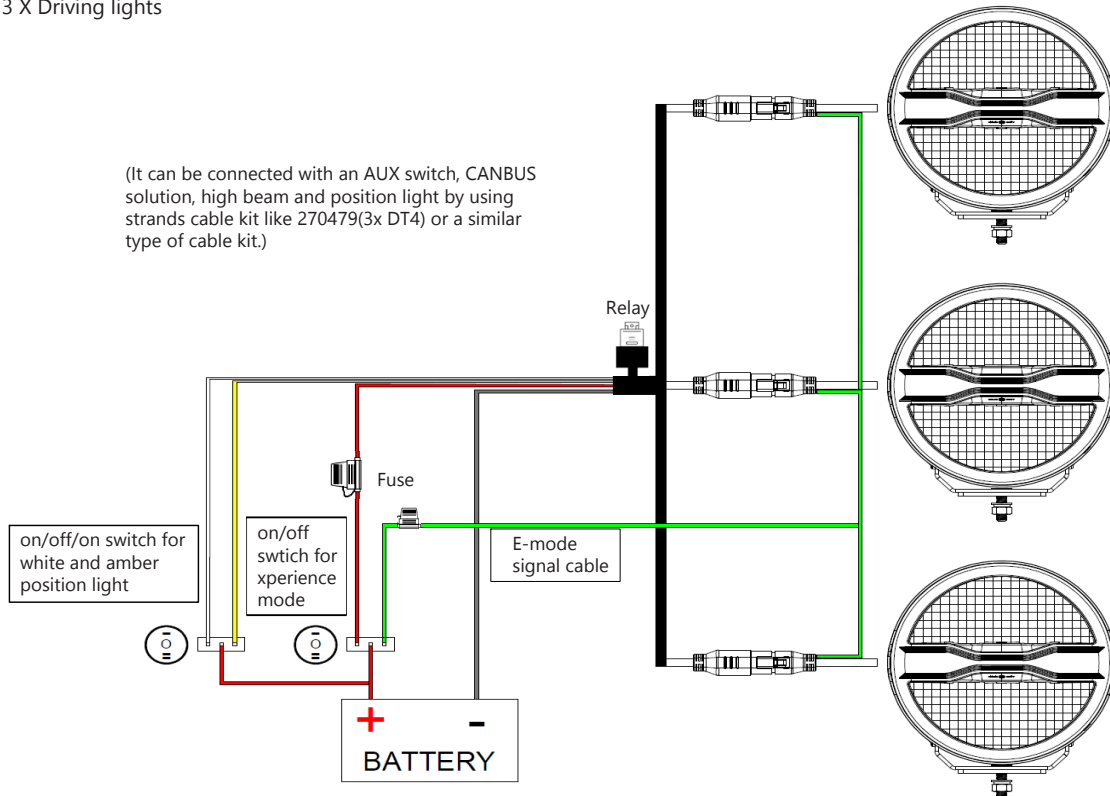

READ THIS BEFORE INSTALLATION

READ ALL INSTRUCTIONS AND STUDY DIAGRAMS BEFORE INSTALLING YOUR NEW LIGHTS!

LEGAL MOUNTING

Check with state or local authorities for laws governing usage and proper mounting of your new lights.

TAKE CARE OF YOUR PRODUCT

Keep the product clean. Dirt on the lens and heat-sink may shorten the products lifetime.

We recommend using lukewarm water and alkaline degreasing.
Follow the degreasing instructions carefully and rinse off gently with cold or lukewarm water on low pressure.

WARNING!

Strong chemicals should not be used on the product. If you accidentally get strong chemicals on the product, rinse off immediately, use plenty of water so that no chemicals remain in any joint. If the product is damaged or has inappropriate paint on the housing due to user actions, the warranty is void. Some chemicals have a small amount of solvent in them, this can dissolve sealing adhesives and compromise the product's waterproofness. Some chemicals pull out liquid from plastic and rubber-based components, which makes the plastic or rubber brittle and bursts more easily. Be careful not to use high water pressure close up on the product. If you use high water pressure at short distances, most products find it difficult to close out the water.

INSTALLATION

If there is a contact/connector on the product, it should not be cutted. If the connector is cut, the warranty is not valid.

If the product has loose cable and no connector. If the cable is shorter than 50 cm, the cable must not be cutted. If the cable is cut, the warranty is not valid.

If the cable is longer than 50 cm, it is ok to shorten the cable, but not shorter than 50 cm.

If the cable is cut shorter than 50 cm, the warranty is not valid.

Tighten screws and bolts so that they do not loosen or chafe.
Do not tighten screws so hard that the protective bearings on the product breaks.

WARNING!

Do not use higher volts than the product description states.
This light becomes hot under continuous use. Don't remove or touch the casing for at least 30 minutes after turning the lamp off.

Part no. 270967

Contact us if you need support: support@strands.se or +46(0)320-450450

2/2



www.strands.se
www.strandseurope.com